

ASSEMBLY AND INSTALLATION INSTRUCTIONS



C0023 / C0024

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.


**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

Parts:

Parts Number (4612MM For C0023)
(4613MM For C0024)

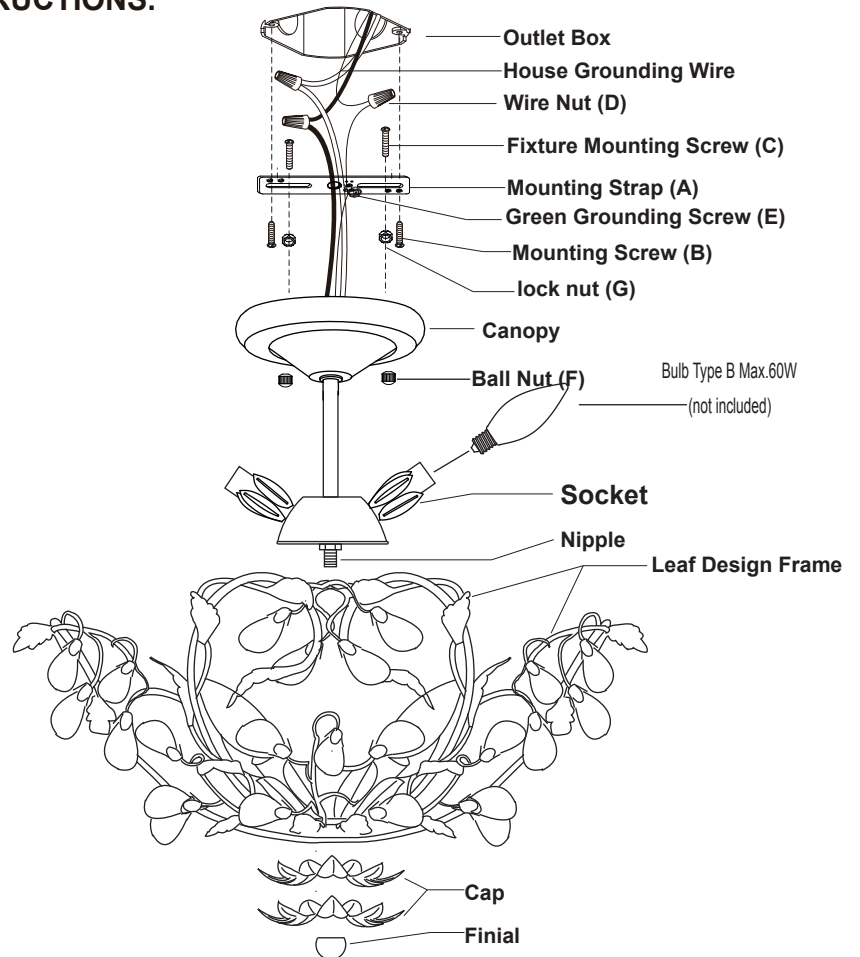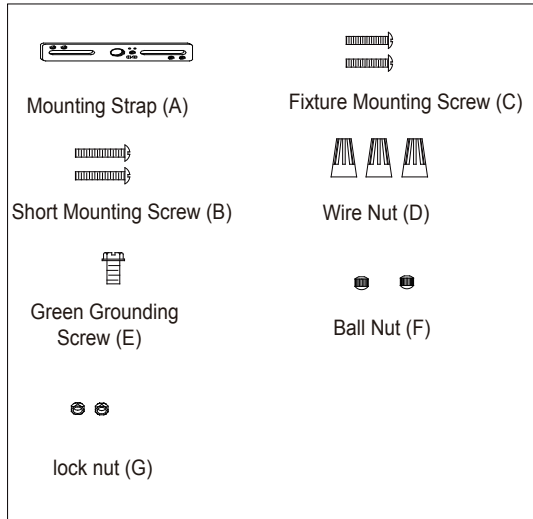

1. Thread two fixture mounting screws to the mounting strap, and secure them with two lock nuts, Adjust the length of the fixture mounting screws if necessary..
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Pull out the outlet wires and house grounding wire from the outlet box. Make wire connections with wire nuts:
 - The black wire from the fixture to the black wire from the power source.
 - The white wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire nut.Carefully put the wires back into the outlet box.
4. Attach the canopy to the mounting strap by inserting the fixture mounting screws, then secure it with two ball nuts.
5. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
6. Attach the leaf design frame and two caps to the sokcet base by inserting the nipple, then secure them with the finial.
7. Turn on the power at the main fuse or circuit breaker box.

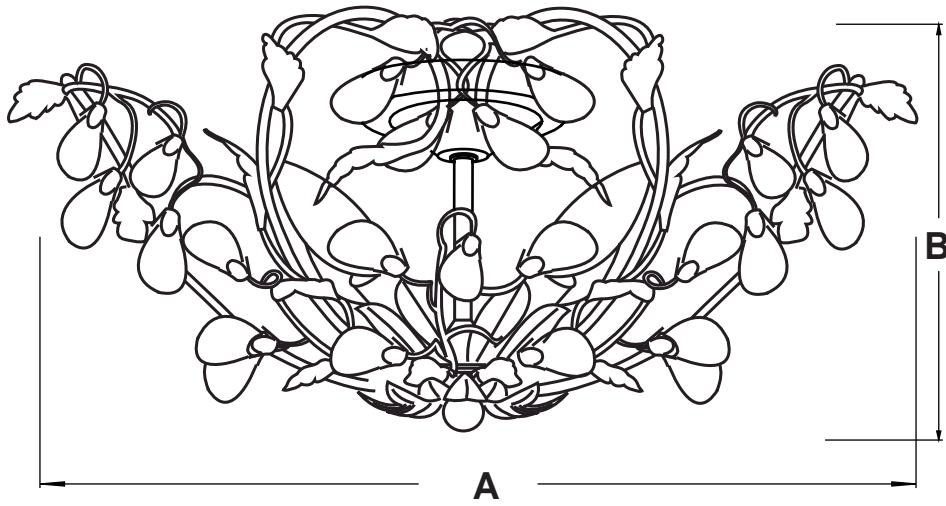

A: 19"
B: 7"